


MODEL 6

SELF-SUPPORTING TUBE-TO-TUBESHEET GTAW (TIG) WELD HEAD



The widest range of orbital welding equipment in the world

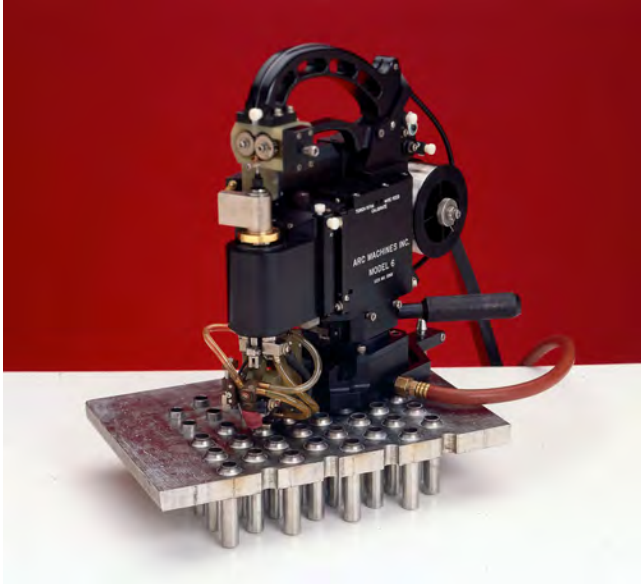

FEATURES


- Rugged, reliable tube-to-tubesheet weld head with 200 A torch.
- Unlimited torch rotation.
- Welds in any position, including overhead.
- Can weld projected or recessed tubes with filler wire, or flush joints without filler wire.
- Makes multiple-pass welds without stopping.
- Air-operated fixtures speed up production.
- Servo-controlled AVC, rotation and synchronized wire feed.
- Water-cooled torches.
- Adjustable torch tilt.
- Automatically sets distance between electrode and tubesheet before arc initiation.
- Non-linear vertical tungsten travel prevents tube-end burn-off.
- Pulsed current welding and synchronized pulsed wire-feed.

The Model 6 is a rugged, field-proven weld head for high-production welding of tube-to-tubesheet using the GTAW process. The Model 6 has exceptionally fast mount and dismount times for ease of operation and productivity. The torch is positioned on the tube to be welded by a pneumatically operated locating fixture. With the touch of a button, the locating fixture precisely locates itself over the tube to be welded.

QUICK SPECS

Weld Current 200 A	Arc Voltage Control (AVC) Automatic	Rotation Speed 0.1 -10.0 RPM	Wire Feed Speed 5 - 100 IPM (13 - 254 cm/min.)
Tungsten Size 1/16" or 3/32" (1,6 mm or 2,4 mm ø)	Travel/Rotation Speed 0.1 - 9.9 RPM	Wire Manipulator (manual adj.) vertical, horizontal and angular	
Filler Wire 0.030" recommended (0,8 mm ø)	Wire Spool 2 lbs, 4" standard (1 kg, 100 mm)	Weight (less cables) 16 lbs. (7,3 kg)	

➔ Several torch options are available.



www.arcmachines.com

sales@arcmachines.com

MODEL 6


TUBE-TO-TUBESHEET WELD HEAD

TORCH OPTIONS

- "C" torch - for fillet welding of projected tubes
- "D" torch - for fillet welding of projected tubes with minimum spacing between tubes
- "E" torch - for welding flush or recessed tubes

The "C" and "D" torches (for fillet welds) are spring-loaded torches with a chill follower. The chill follower is located on the inside of the tube to be welded and contacts the tube wall exactly opposite the electrode, thus minimizing the possibility of burn-through on thin-wall tubes. The mechanics of the spring-loaded torch allows it to perfectly track the shape of the tube regardless of minor ovality.

Gas chamber for welding titanium available.

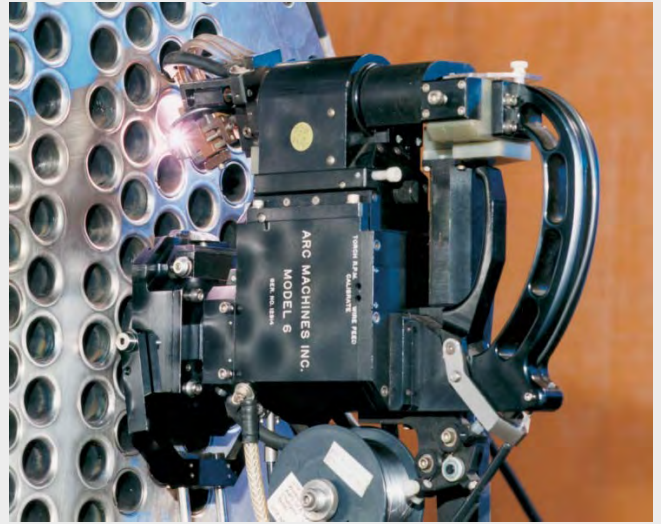

COMPATIBLE AMI POWER SUPPLIES

The Model 6 is compatible with the following AMI Power Supplies:

Model 227

The #1 Power Supply for Heavy Wall Pipe Welding



Model 415

The Industry's Most Advanced Power Supply and Controller



Leaders & Innovators in

Automated Orbital Welding

*For further information please visit our website
or contact us at 1-818-896-9556*



AMI

ARC MACHINES, INC.®

www.arcmachines.com

sales@arcmachines.com

HEADQUARTERS
Arc Machines, Inc.

10500 Orbital Way
Pacoima, CA 91331 U.S.A.
Tel: +1 / 818 / 896 / 9556
Fax: +1 / 818 / 890 / 3724
sales@arcmachines.com

EUROPEAN BRANCH OFFICE
Arc Machines, Inc.

Chemin du Lavasson 2, CH-1196
Gland, Switzerland
Tel: +41 / 22 / 995 / 0051
Fax: +41 / 22 / 995 / 0059
sales@arcmachines.ch

GERMAN OFFICE
Arc Machines GmbH

Markelsbach 2
D-53804 Much, Germany
Tel: +49 / 2245 / 91680
Fax: +49 / 2245 / 916868
sales@arcmachines.de

UK OFFICE
Arc Machines UK Limited
Unit 2 Lamport Court
Heartlands Business Park
Daventry, NN11 8UF, UK
Tel: +44 / 1327 / 312787
Fax: +44 / 1327 / 315034
sales@arcmachines.co.uk